TOUCH SYSTEMS

V4680I-U3 / V4680I-U3x2

46" Large-Format Multi-Touch Display

This display offers strong performance wedded with lowered energy consumption. The touch display features LED backlighting, a key reason behind the lessened energy cost, and a full HD LCD display. It is equipped with an Open Pluggable Specification (OPS)-compliant slot, ensuring easy installation and maintenance of digital signage. The touch screen also comes with built-in speakers and integrated temperature sensors and fans. The display is integrated with infra red, a multi-touch technology, and is offered as a dual-touch (V4680I-U3x2) or multi-touch (V4680I-U3) solution. The multi-touch display comes with six touch points and is Windows 8 ready.

AT A GLANCE

- Windows 8 ready
- LED backlit
- Full HD LCD display
- OPS-compliant slot

APPLICATIONS

- Retail
- Hospitality
- Restaurant
- Education

Specifications

Panel	V463
Viewable Image Size	46"
Touch Technology	Infra Red
Pixel Pitch	0.53 mm
Brightness	350cd/m² (typical)
Contrast Ratio	4000:1
Aspect Ratio	16:9
Resolution	1920 x 1080
Response Time	8 ms
Viewing Angle	178° Vertical; 178° Horizontal
Connectivity	DisplayPort, HDMI, DVI-D, VGA 15-pin D-sub (shared S-Video, Video, Component)
Compatibility	Windows 7 and 8, Vista, and XP; Linux; Mac OS
Power Consumption	On: 76W; Standby: <2W
Dimensions (WxHxD)	45.5 x 24.875 x 3.00 in (without stand) - infra red
Weight	61.7 lbs (without stand)
VESA Hole Configuration	300mm x 300mm
Operating Temperature	41-104 °F / 5-40 °C
Operating Humidity	10-90%
Standards	FCC Class B, C-UL
Limited Warranty	3 Years, Parts and Labor, including Backlight

800.320.5944 sales@touchsystems.com

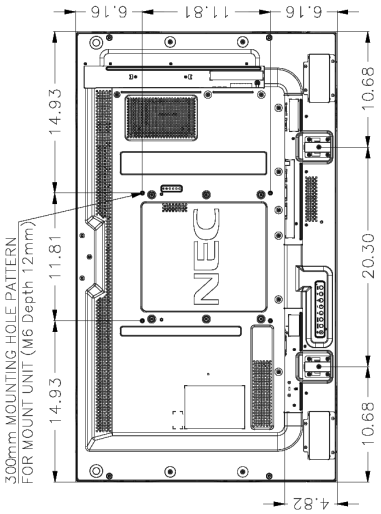

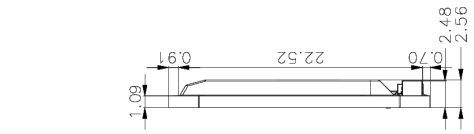

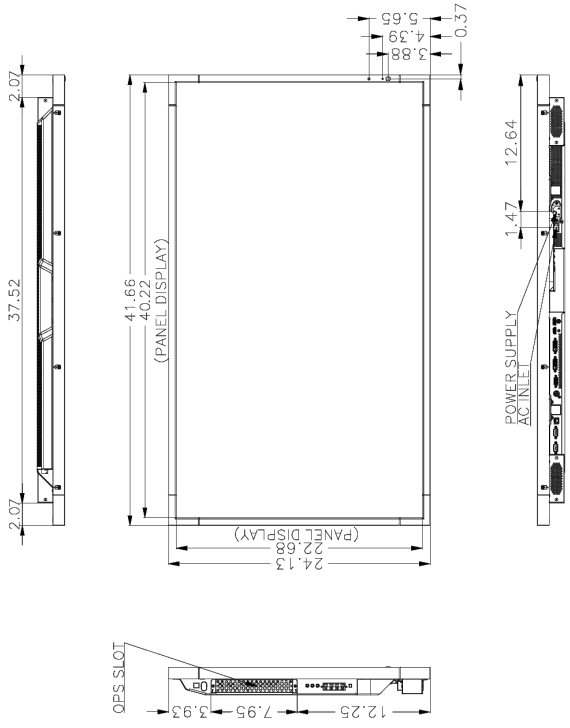

CONTACT

220 Tradesmen Dr.

Hutto, Texas 78634

1.800.320.5944

sales@touchsystems.com

Copyright 2014 TouchSystems. All rights reserved.